



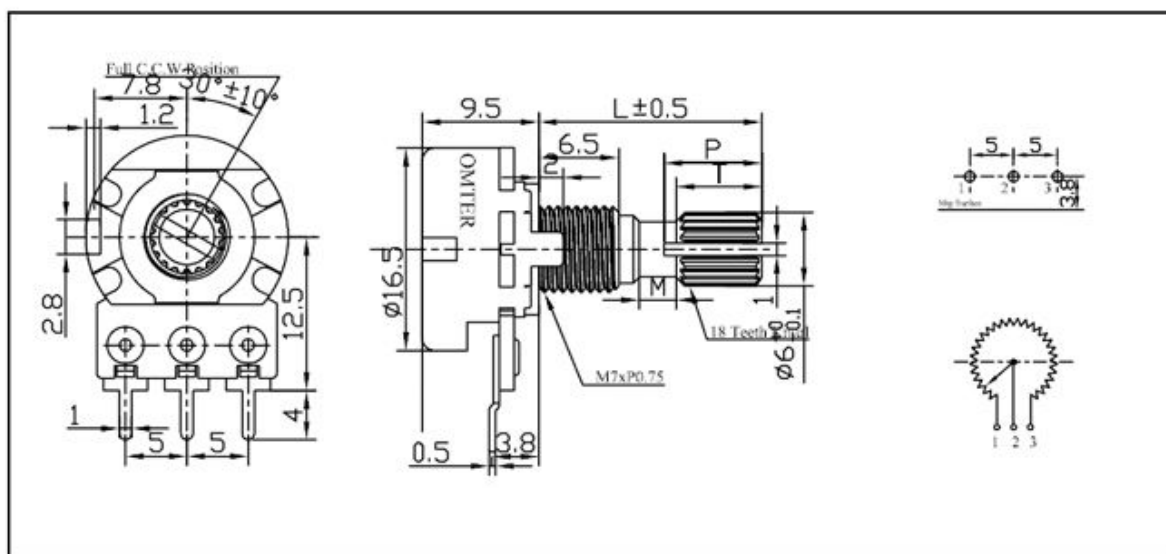

Yueqing Omtier Electronic & Technology Co., Ltd.

F-16KN



参数特性 General Specification:

全阻值: Total Resistance	500Ω- 1MΩ
全阻值公差 Total Resistance tolerance:	±20%
抵抗变化特性: Resistance Tape	A,B,C,D
最大工作电压:Max. operation voltage	Linear B: AC 200V; Other: AC 150V
额定功率: (W) Ratings Power	Single Unit Linear B: 0.2W; Other: 0.1W Dual Unit Linear B: 0.125W; Other: 0.06W
杂音: Noise	Less than 100mV
耐电压:Withstanding voltage	1 minute at AC 500V
绝缘抵抗:Insulation resistance	More than 100MΩat DC 500V
残留阻值: Residual Resistance Value	Term.1~2: Less than 20Ω Term.2~3: Less than 20Ω
同步误差: Tracking Error	-40dB~0dB±3dB
开关回路: Switch return route	S.P.S.T.
开关接触电阻: Switch contact resistance	Less than 50mΩ
开关额定功率: Switch power rate	Single Unit 1.0A at AC/DC 12V Dual Unit 2.0A at AC/DC 125V
全回转角度: Total Rotation Angle	300±5(degree)
旋转力矩: Rotation Torque	20~200 gf.cm
旋转止动强度: Shaft Stop Strength	7.0Kgf.cm Min
推拉强度: push-pull strength	8.0 kgf Min
开关旋转角度: Switch rotation angle	35±10(degree)
开关力矩: Switch torque	150~500gf.cm

地址: 浙江省乐清市乐成镇后所工业区 ADD: Housuo Industrial Zone, Yuecheng Town, Yueqing City, Zhejiang, China
 电话 Tel: +86-577- 27811881 传真 Fax: +86-577-62591280 Email: Omtier@omtier.com Website: www.omtier-tyxn.com