


WXD 系列 线绕多圈电位器
WXD Series Wire-wound potentiometer

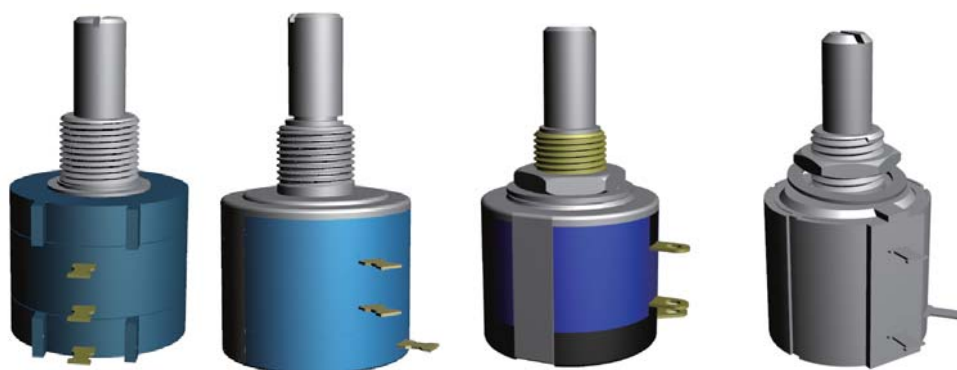


3590 — 1 — 10KΩ ±10% — S — 20


TYPE Variety Resistance Resistance Tolerance Shaft Type Shaft Length

Main performance	3590	3540	534	7286
Rated power	2W	2W	2W	2W
Max.operating voltage	160V DC	80V DC	315V	
Standard Resistance Range	200Ω----100KΩ	200Ω----100KΩ	100Ω----100KΩ	100Ω----100KΩ
Resistance Tolerancer	±2% ±5%	±2% ±5%	±5%	±5%
Rotation torque	2--100m N.m	2--100m N.m	2--100m N.m	2--100m N.m
Staring Torque	≤36mN·m	≤36mN·m	≤36mN·m	≤36mN·m
Clutch Torque	≥300mN·m	≥300mN·m	≥300mN·m	≥300mN·m
Total mechanical travel	1000000 Cycles		10000 Cycles	
Mechanical endurance	3600°±10°			
Temperature Range	-55℃—+125℃			



3590

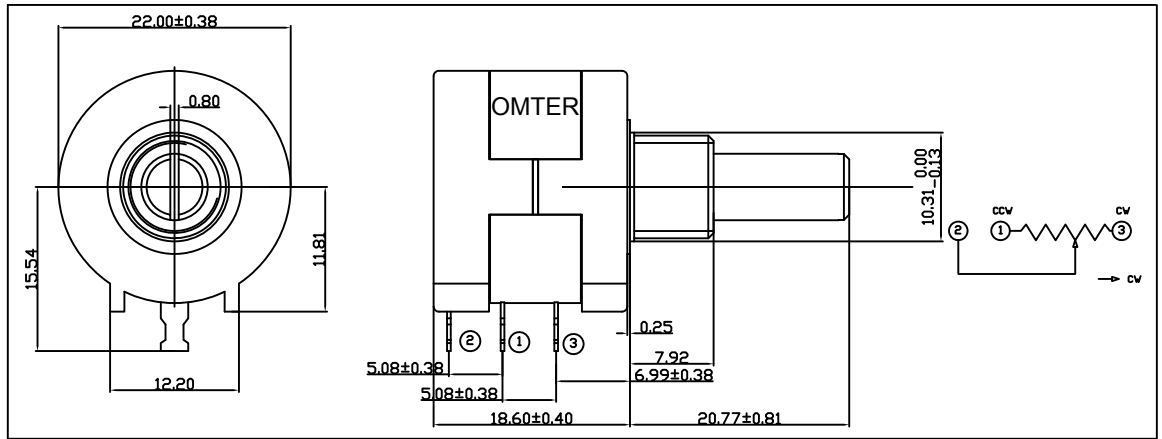

3540

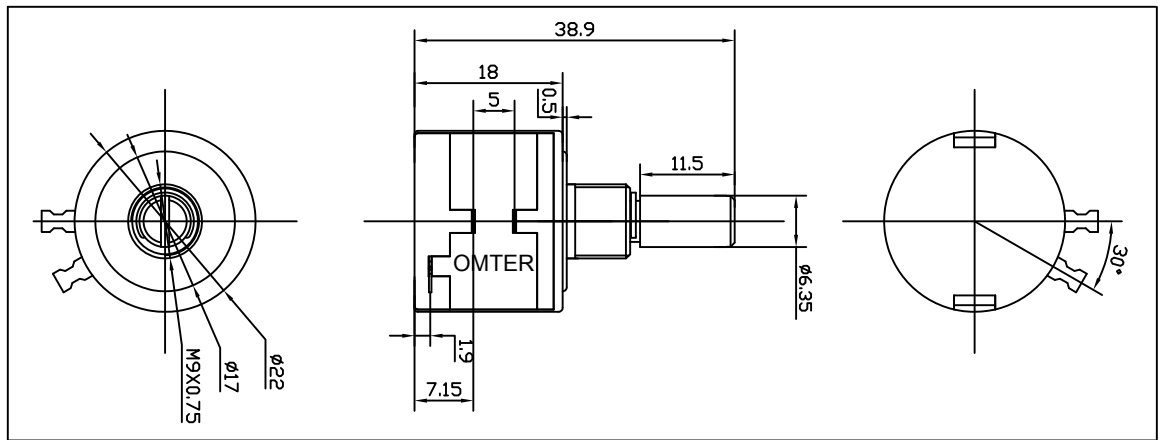

534

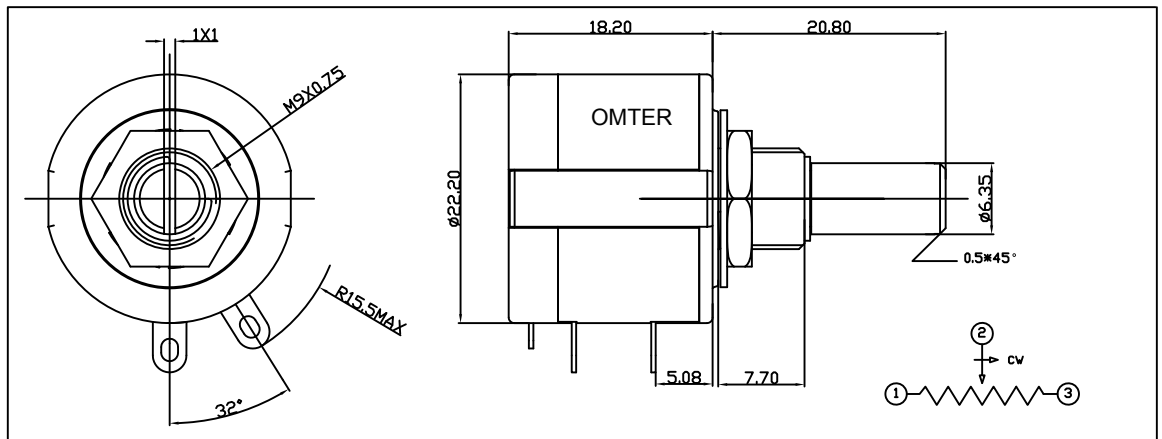

7286

